


MINI-M


Male MINI quick coupler DN 5.5



CODE	T	P	L	C	H
MINI-M1-L	G1/8"	16,5	36,2	15,7	14
MINI-M1-316V	G1/8"	16,5	36,2	15,7	14
MINI-M-L	G1/4"	16,5	38,2	15,7	14
MINI-M-316V	G1/4"	16,5	38,2	15,7	14
MINI-M3-316V	G3/8"	16,5	39,2	21	19

MINI-H


Female MINI quick coupler DN 5.5



CODE	T	P	L	C	H
MINI-H1-L	G1/8"	16,5	37,2	15,7	14
MINI-H1-316V	G1/8"	16,5	37,2	15,7	14
MINI-H-L	G1/4"	16,5	39,2	19,0	17
MINI-H-316V	G1/4"	16,5	39,2	19,0	17

MINI-E


MINI quick coupler with barb connector DN 5.5



CODE	E	P	L	C	H
MINI-E6-L	6,3	16,5	48,2	15,7	14
MINI-E6-316V	6,3	16,5	48,2	15,7	14
MINI-E8-L	8,3	16,5	48,2	15,7	14
MINI-E8-316V	8,3	16,5	48,2	15,7	14

MINI-MM

Bulkhead push-on MINI quick coupler DN 5.5

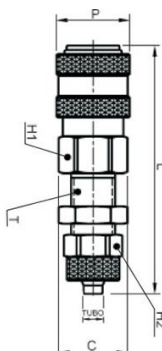

CODE	Ø	T	P	L	C	H1	H2
MINI-MM6-L	6X4	M10X1	16,5	56,7	15,7	14	12
MINI-MM6-316V	6X4	M10X1	16,5	56,7	15,7	14	13
MINI-MM8-L	8X6	M12X1	16,5	56,7	15,7	14	14
MINI-MM8-316V	8X6	M12X1	16,5	56,7	15,7	14	14

